VERSIONE IDRAULICA-HYDRAULIC VERSION

AESTRO

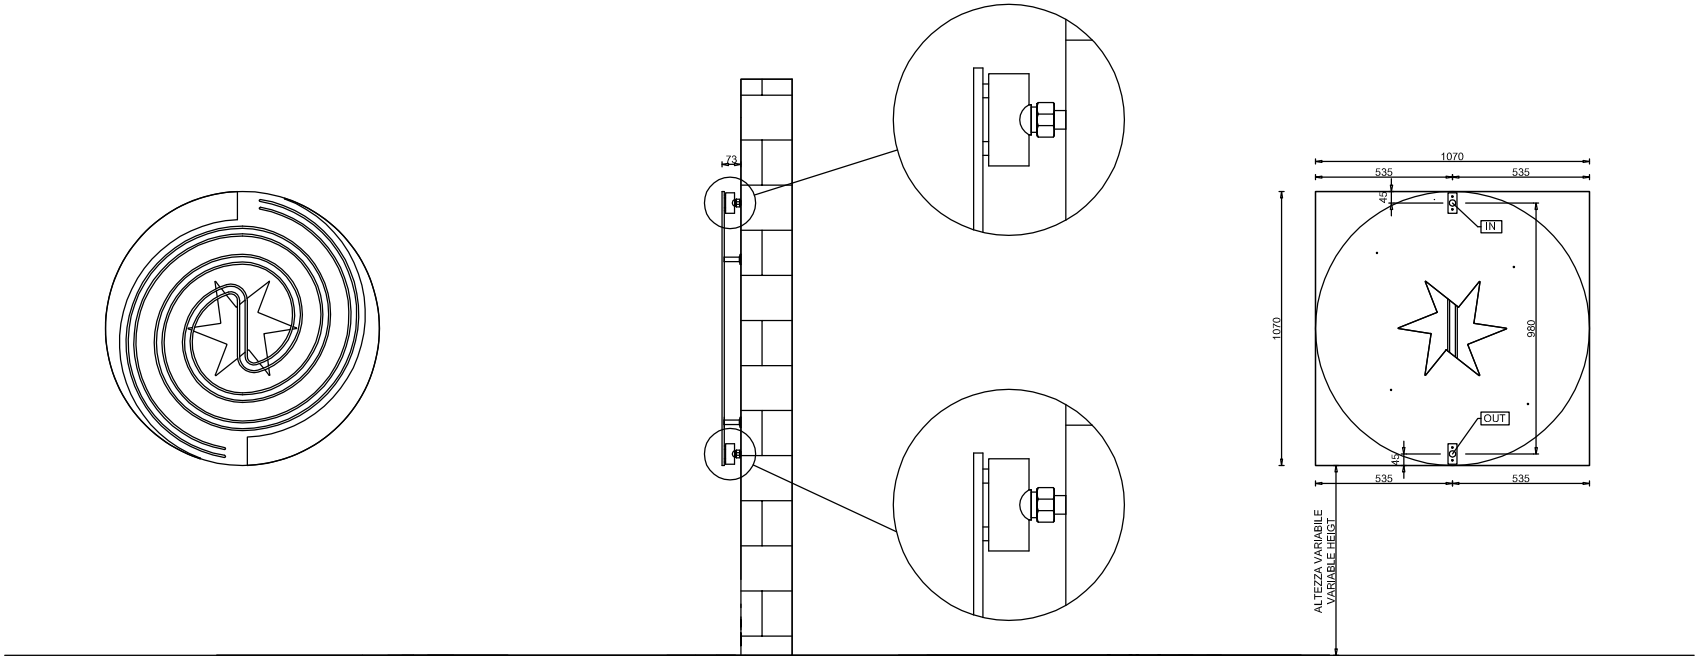

GRUPPO VALVOLE REMOTO
Valvola e detentore per il collegamento ad una distanza massima di 6 m. dal radiatore.
Il gruppo valvole è disponibile in finitura cromo lucido.

VALVE SET FOR REMOTE CONNECTION
Valve set and lockshield valves for remote connection can be installed at a maximum distance of 6 m from the radiator.
Valve set is available only with polished chromium finishing.

SISTEMA DI COLLEGAMENTO
SYSTEM CONNECTION



CARATTERISTICHE TECNICHE:
Corpo scaldante interamente in **alluminio**, circolazione fluido vettore in **rame** collettori di distribuzione in **acciaio.**
Temperatura massima d' esercizio 95° C.
Pressione massima d' esercizio 15 bar.
Verniciatura a polveri liposolubili ecologiche 20 gloss di brillantezza.

TECHNICAL FEATURES
Aluminium body, **copper** circuit for fluid circulation, **steel** distribution manifolds.
Maximum working temperature 95° C
Maximum working pressure 15 bar
Ecological epoxy resin painted, mat (20 gloss)

Modello Model	Altezza mm. Height mm.	Larghezza mm. Width mm.	Potenza Watt ΔT50° Power Watt ΔT50°	Contenuto Acqua Lt Water Content Lt	Peso Kg. Weight Kg.
AES1070107	1070	1070	825	0.85	22.5

* Le rese sono calcolate ed in fase di certificazione, potenza calcolata Δ T 50° C.
*Yields have been estimated and waiting for certification, estimated power Δ T 50° C